


De-awner type SR

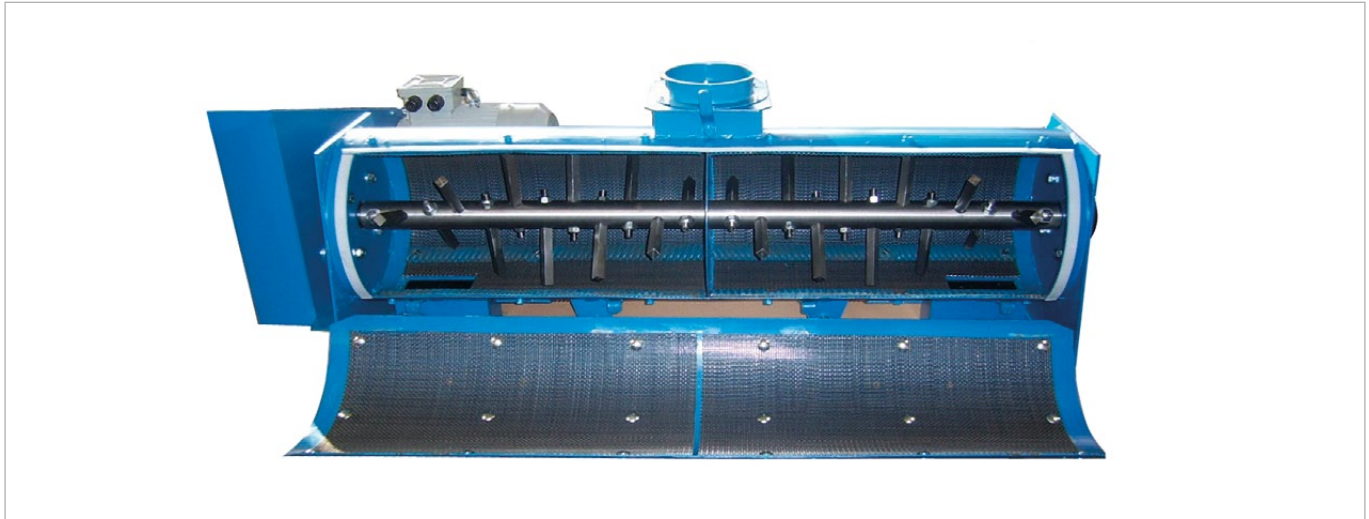

- Separation of awns and husks from grain and grass seeds
- The product enters the de-awner from top inlet, is entrained by the rotating beaters and rubbed against the cylindric housing
- Mantle with special debearder wire for effective operation

Standard construction

- Solid steel construction
- Cylindrical design for rotation effect
- Helical arranged beaters
- Square wire mesh for optimum effect
- Large cleaning and inspection hatch
- Outlet opening adjustable

Options

- Cocked execution with automatic capacity regulation by electrical operated outlet flap which is controlled by the drive motor charging rate

Technical data

Type	Capacity	Motor
Size 1 – 22	1.5 – 2 t/h	2.2 kW
Size 2 – 40	3 – 4 t/h	4.0 kW
Size 2 – 55	4 – 5 t/h	5.5 kW
Size 3 – 75	5 – 7 t/h	7.5 kW
Size 3 – 110	8 – 10 t/h	11.0 kW
Size 3 – 150	10 – 15 t/h	15.0 kW
Size 4 – 185	20 t/h	18.5 kW
Size 4 – 220	30 t/h	22.0 kW