

Vibratory Trough Conveyors

type 500 / 750 / 1000 / 1250 / 1500




- Conveying and dosing of bulk goods (cereals, granules, powders, flours, etc.)
- Length up to max. 6.000 mm (depending on type)
- Solid steel construction

Standard Construction

- Setup supported or suspended
- Elastic supports
- Driven by two vibrators, mounted below / beside / above the trough

Options

- Frequency converter for continuous adjustment of motor rpm
- Closed design for dust-proof, hygienic conveyance (inlet / outlet with flexible connections, aspiration spout)
- Execution in stainless steel (suitable for food, fertilizer)
- Wear protection lining

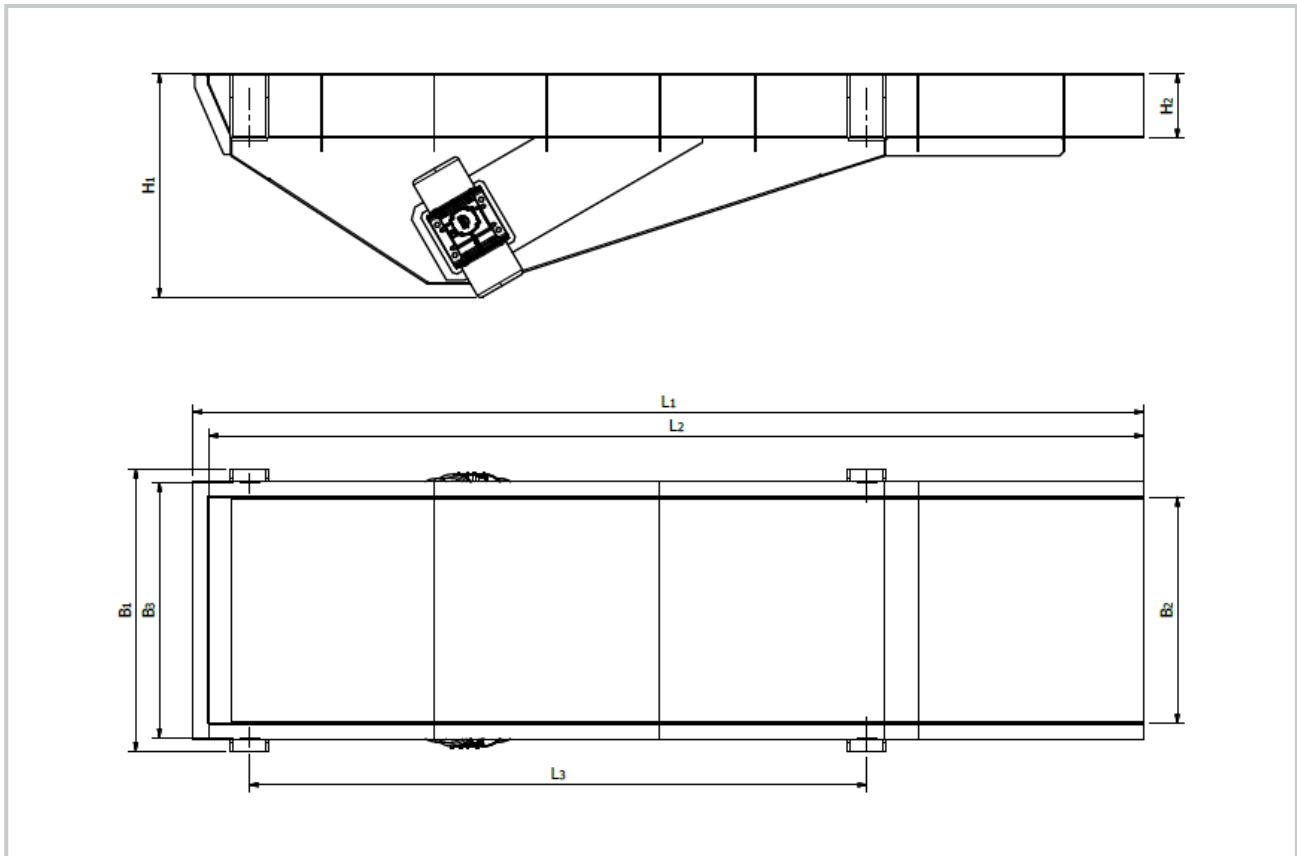

Type		500	750	1000	1250	1500
Vibrators	kW	2x 0,68	2x 0,68	2x 0,68	2x 0,75	2x 0,75
Capacity (max)	m ³ /h	65	140	190	225	285
L1	mm	L2 + 70	L2 + 70	L2 + 70	L2 + 70	L2 + 70
L2 (min / max)	mm	1000 / 6000	1000 / 6000	1000 / 6000	1500 / 6000	2000 / 6000
L3	mm	1550	1550	1500	1450	1450
B1	mm	920 / 750	1170 / 1000	1270 / 1250	1470 / 1500	1570 / 1750
B2	mm	500	780	1000	1250	1500
B3	mm	625	875	1125	1375	1625
H1	mm	760	780	840	920	890
H2	mm	200	225	250	250	250
Weight (bei L2 = 2.500 mm)	kg	360	415	460	540	575

- Support / Suspension not included
- Other diameters for lower / higher capacity on request